

# COMBOLIGHT® COMBO CLASSIC RECESSED

## LAMP GROUP 2 - CONFIGURATION "F"

**TWO (2) Halogen lamp cells - ONE (1) Fluorescent lamp cells**  
**New Construction Recessed Housing - Trim or Trimless**

### DESCRIPTION:

An adjustable recessed fixture suitable for multiple downlighting applications with one point of electrical entry. Mixes the use of halogen lamps with fluorescent lamps. Powder coat finish on housing & lamp assembly.

### CONSTRUCTION:

Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture is offered with a .75" ceiling trim or as a trimless fixture. Can accommodate 0.50" to 1.00" ceiling thickness.

### LAMP ASSEMBLY:

Four low voltage or line voltage halogen lamp cells with one fluorescent lamp cell. Can accept up to two optical accessories. 380° x 45° locking lamp adjustment. Provides 45° visual cut-off.

### SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation


### ELECTRICAL:

Fixture is two circuit.  
**Circuit 1:** Integral electronic transformer for low voltage lamps. Fused and short circuit protection. Dimmable.

**Circuit 2:** Integral electronic ballasts for fluorescent lamps.  
**Lutron® dimming ballasts available upon request.**

Junction box is UL listed for through branch wiring, for 8 #12, 90°C supply conductors or 60°C for end of run (access above ceiling not required).

Made in the USA.

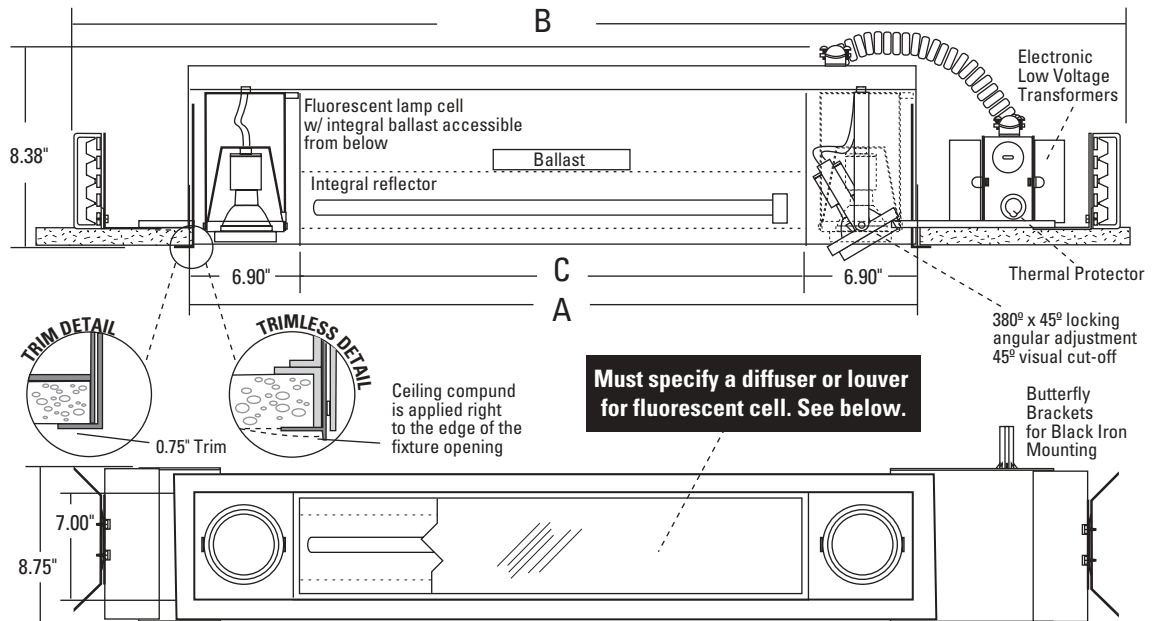

Custom configurations are available with Combo Classic fixtures.  
 Also available with T8 fluorescent lamps. Consult RSA for details



| Fluorescent >> |   | BX40   | BX50   | PLL80  | PLT26  | PLT32  | PLT42  | T528   | T535   | T5HO39 | T5HO54 |
|----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Lamp Group 2   | A | 39.59" | 39.59" | 39.59" | 22.09" | 22.59" | 23.59" | 63.09" | 75.09" | 51.09" | 63.09" |
|                | B | 51.39" | 51.39" | 51.39" | 33.89" | 34.89" | 35.89" | 74.89" | 86.89" | 62.89" | 74.89" |
|                | C | 25.50" | 25.50" | 25.50" | 8.00"  | 8.50"  | 9.50"  | 49.00" | 61.00" | 37.00" | 49.00" |

**ORDERING EXAMPLE:** CR220 F BX40 BK WH 120

= Two PAR20 120V lamps with One BIAx® 40W Fluorescent • Black Interior • White Trim • 120 volts

Optional Accessories - See RSA Combo Classic accessory page for details.

|        |        |         |        |
|--------|--------|---------|--------|
|        |        |         |        |
| Baffle | Snoots | Louvers | Lenses |

Fluorescent Diffusers and Louvers - Please specify

|                                                        |                                                    |
|--------------------------------------------------------|----------------------------------------------------|
| <input type="checkbox"/> TWD - Textured White Diffuser | <input type="checkbox"/> CB1 - 2" Parabolic Louver |
| <input type="checkbox"/> MPD - Conical Prism Diffuser  | <input type="checkbox"/> CB2 - 1" Parabolic Louver |

| Item # / Lamp Type | Configuration                                                                         | Fluorescent Lamp Cell | Interior Finish | Trim Finish   | Voltage                                     |
|--------------------|---------------------------------------------------------------------------------------|-----------------------|-----------------|---------------|---------------------------------------------|
| Lamp Group 2       | F - Two Low Voltage or Line Voltage Halogen lamp cells with One Fluorescent lamp cell | BX40 - 40W BIAx®      | BK - Black      | BK - Black    | 120 - 120 Volts                             |
|                    |                                                                                       | BX50 - 50W BIAx®      | WH - White      | WH - White    | 277 - 277 Volts                             |
|                    |                                                                                       | PLL80 - 80W PL-L      | S - Silver      | S - Silver    | 277 volt option for low voltage models only |
|                    |                                                                                       | PLT26 - 26W PL-T      | PT - Custom     | PT - Custom   |                                             |
|                    |                                                                                       | PLT32 - 32W PL-T      |                 | TR - Trimless |                                             |
|                    |                                                                                       | PLT42 - 42W PL-T      |                 |               |                                             |
|                    |                                                                                       | T528 - 28W T5         |                 |               |                                             |
|                    |                                                                                       | T535 - 35W T5         |                 |               |                                             |
|                    |                                                                                       | T5HO39 - 39W T5HO     |                 |               |                                             |
|                    |                                                                                       | T5HO54 - 54W T5HO     |                 |               |                                             |

T8 lamps also available

SPECIFY - 

|  |   |  |  |  |
|--|---|--|--|--|
|  | F |  |  |  |
|--|---|--|--|--|

# RSA LIGHTING®

RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311  
 TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com  
 ©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.